

SAV 890.42

TUNNEL DEMAGNETISER

For demagnetising large-area, thin-walled parts



APPLICATION

An interfering residual magnetism can remain in steel and cast workpieces after machining. If these parts have to be demagnetised for other purposes, this can usually be easily achieved with the tunnel demagnetisers.

DESIGN


Demagnetising coil cast in polyurethane, optionally with low-frequency generator for workpieces which are difficult to demagnetise.

TECHNICAL DATA

- Protection rating: IP 55
- Power supply: 400 VAC
- Supply frequency: 50 to 60 Hz
- Other voltages on request



mm										VA	kg
A	B	C	D	E	F	G	H	I	J	Power	Weight
150	100	290	240	410	15	360	200	250	180	2300	32.0
250	250	390	390	510	15	460	200	250	180	3500	65.0
350	300	490	440	610	15	560	200	250	230	4800	90.0
400	200	540	340	660	15	610	200	250	230	5200	87.0
400	400	540	540	660	15	610	200	250	230	6500	110.0
550	550	690	690	810	15	760	200	250	230	6950	132.0

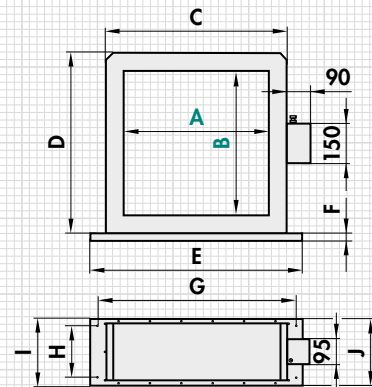

ORDERING EXAMPLE

Designation SAV no. - A x B - line voltage
 Tunnel demagnetiser SAV 890.42 - 400 x 400 - 400 V