

SAV 246.42**PERMANENT MAGNETIC JOINT**

Magnetic aid for welding and assembly with different angles

APPLICATION

As a welding and assembly aid for frame processing at any angle from 25° to 280°. With markings for 90°, 60°, 45° and 30°.

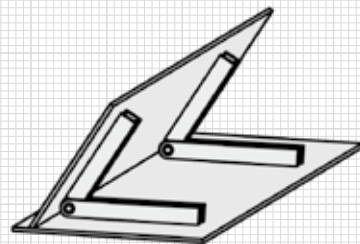
If higher holding forces are required, several magnetic joints can be stacked. The maximum application temperature of 120 °C should not be exceeded. We therefore recommend using the magnetic joints for the tack welds and then removing them.

DESIGN

All edges are magnetic.



Length	mm		Rated holding force per bar	Weight
	Width	Height		
194+105	11	24	20	0.49

**ORDERING EXAMPLE**

Designation	SAV no.
Permanent magnetic joint	SAV 246.42