

SAV 248.05**LAMINATED TOP PLATES**

For placing on circular magnet SAV 244.06 with radial pole pitch

**DESIGN**

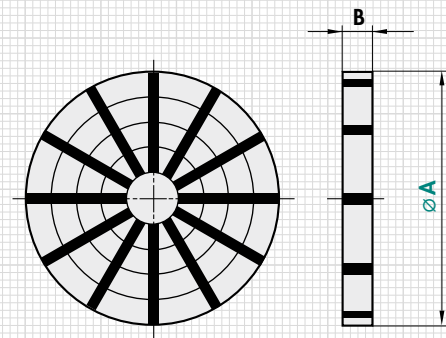
For chucking profiled workpieces on permanent magnetic circular chuck SAV 244.06. Attaching to a magnet upon agreement.

TECHNICAL DATA

- Permitted profile depth: Max. 8 mm



A	B	Poles	Weight
150	20	10	3.0
200	20	12	5.0
250	20	16	8.0
300	25	16	14.0
350	25	20	19.0
400	25	20	24.5

**ORDERING EXAMPLE**

Designation	SAV no. - A
Laminated top plate	SAV 248.05 - 150