


SAV 248.01

LAMINATED TOP PLATES

For placing on circular magnets with parallel pole pitch



APPLICATION

For chucking profiled workpieces on magnets with parallel pole pitch.


DESIGN

Any type and form of profiles can be machined into the chuck blocks (can also be provided by us). Note maximum machining dimension for this. Attaching to a magnet upon agreement. The pole division must run parallel to the base magnet.

TECHNICAL DATA

- Pole pitch: 3 mm steel, 1 mm brass
- Maximum integration depth: 8 mm

The machining process can cause discolourations. However, these do not constitute a technical defect.

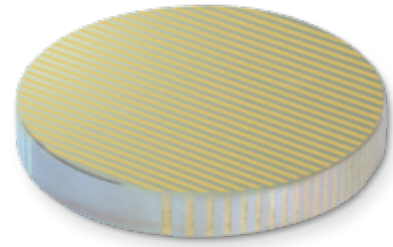

[mm]		[kg]	
A	B	Weight	
160	25	4.0	
200	25	6.0	
250	25	10.0	
300	25	14.0	
350	25	19.0	
400	30	30.0	

Other dimensions on request

ORDERING EXAMPLE

Designation	SAV no. - A
Laminated top plate	SAV 248.01 - 400