

SAV 240.33**HOLDING MAGNETS**

High-energy magnets with threaded stud

DESIGN


Flat pot magnet with threaded stud,
galvanised surface, shielded system.
Max. service temperature: 80 °C.

MAGNET MATERIAL


NdFeB

FASTENING OPTION

Screwing in

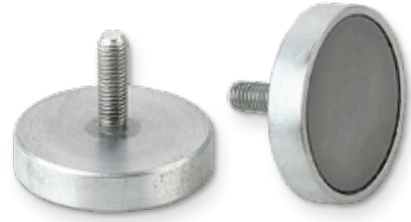

Type	mm				N	kg
	A	B	C	D	Rated holding force	Weight
MH 33 - 10	10	4.5	M 4	12.5	25	0.003
MH 33 - 13	13	4.5	M 5	12.5	60	0.005
MH 33 - 16	16	4.5	M 6	12.5	95	0.008
MH 33 - 20	20	6	M 6	16	140	0.016
MH 33 - 25	25	7	M 6	17	200	0.025
MH 33 - 32	32	7	M 6	17	350	0.048

**ORDERING EXAMPLE**

Designation	SAV no. - type
Holding magnet	SAV 240.33 - MH 33 - 32