

**SAV 240.46**

**MAGNETIC CORES**

Made of AlNiCo 500 in specific lengths

**DESIGN**


Polished face sides, unshielded magnet.  
Max. service temperature: 450 °C.

**MAGNET MATERIAL**

AlNiCo 500

**FASTENING OPTION**


Pressing, glueing.

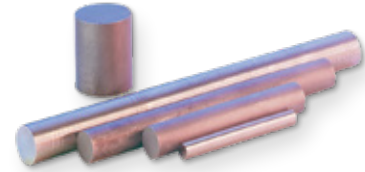

Type	mm	
	A ±0.2	B ±0.2 Standard
MK 30 - 03	3	10 / 12
MK 30 - 04	4	10 / 16 / 20
MK 30 - 05	5	10 / 20 / 30
MK 30 - 06	6	15 / 20 / 24 / 30
MK 30 - 08	8	10 / 25
MK 30 - 10	10	20 / 30 / 40
MK 30 - 12	12	40
MK 30 - 15	15	30 / 60
MK 30 - 20	20	40 / 60 / 80
MK 30 - 34	34	80

**ORDERING EXAMPLE**

**Designation** SAV no. - type x length  
Magnetic core SAV 240.46 - MK 30 - 12 x 50

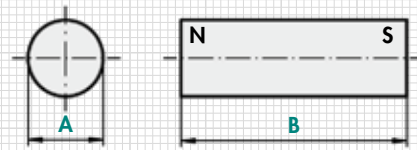

**NOTE**

Rated holding forces cannot be stated for open magnet systems.  
Machining: grinding only.  
Intermediate sizes are available if dimensions are provided.  
For cost reasons, a minimum quantity of 25 units always applies.