

**SAV 246.41****PERMANENT MAGNETIC JOINT**

Magnetic aid for welding and assembly


**APPLICATION**

As a welding aid for holding sheets, flat iron, etc.

To avoid overloading the magnetic joint thermally, we recommend using the magnetic aid only for the tack welds and then removing it.

**DESIGN**

Two permanent magnet chucks connected with struts. Any angle can be set. Can be clamped with two wing nuts. Delivered individually (**S**) or as a joint (**G**).

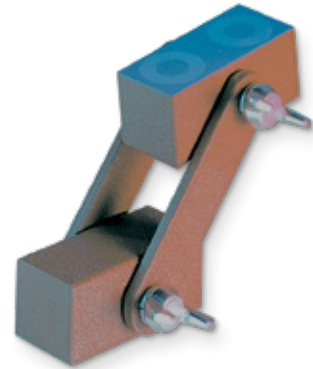

mm			daN	kg
Length	Width	Height	Rated holding force per block	Weight
60	26	25	20	0.7

**ORDERING EXAMPLE**

Designation	SAV no. - individual or joint
Permanent magnetic joint	SAV 246.41 - G

