


**SAV 248.03**

**LAMINATED TOP PLATES**

For placing on magnetic chucks with parallel pole pitch



**APPLICATION**


For placing on magnetic chucks with parallel divisions to conduct the magnetic field into the workpiece.

**DESIGN**

Attaching to a magnet upon agreement.

**TECHNICAL DATA**

- Pole pitch: 3 mm steel, 1 mm brass
- Profile depth: Max. 8 mm


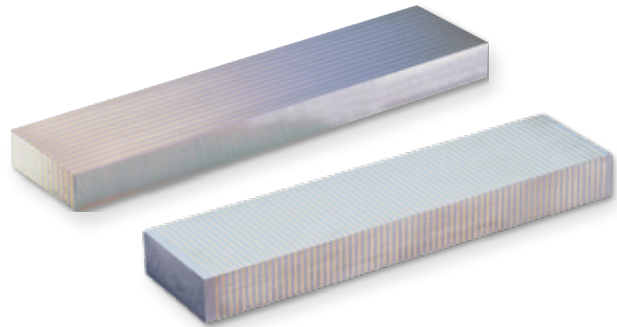


mm			kg
A	B	C	Weight
320	75	25	4.8
650	75	25	9.8
320	100	40	10.1
650	100	40	20.5

Design with longitudinal pole pitch

mm			kg
A	B	C	Weight
250	75	25	3.8
500	75	25	7.5
250	100	25	5.0
500	100	25	10.0
400	75	25	6.0
250	75	40	6.0
500	75	40	12.0
200	100	40	6.4
400	100	40	12.8
500	100	40	16.0

Version with transverse pole pitch



**ORDERING EXAMPLE**

Designation SAV no. - A x B x C

Laminated top plate SAV 248.03 - 400 x 100 x 40