

**SAV 240.23**

**HOLDING MAGNETS**

With internal thread

**DESIGN**


Shielded system, galvanised surface.  
Max. service temperature: 200 °C.

**FASTENING OPTION**


Screws

**MAGNET MATERIAL**

Hard ferrite (oxide 380)

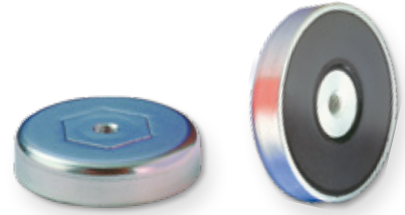

Type	mm				Weight	kg	N
	A ±0.2	B ±0.2	C	D			
MH 23 - 25 - 07	25	7	M 4	5.2	0.018	36	
MH 23 - 32 - 07	32	7	M 4	5.2	0.029	75	
MH 23 - 40 - 08	40	8	M 4	5.2	0.053	90	
MH 23 - 50 - 10	50	10	M 6	12	0.094	170	
MH 23 - 50 - 10	50	10	M 8	12	0.094	170	
MH 23 - 63 - 14	63	14	M 8	13	0.206	290	
MH 23 - 80 - 08	80	18	M 8	14.5	0.472	550	
MH 23 - 80 - 10	80	18	M 10	14.5	0.466	550	

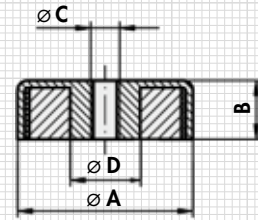

**ORDERING EXAMPLE**

Designation      SAV no. - type  
Holding magnet   SAV 240.23 - MH 23 - 40 - 08