

**SAV 240.33**

**HOLDING MAGNETS**

High-energy magnets with threaded stud

**DESIGN**


Flat pot magnet with threaded stud, galvanised surface, shielded system. Max. service temperature: 80 °C.

**MAGNET MATERIAL**


NdFeB

**FASTENING OPTION**

Screwing in

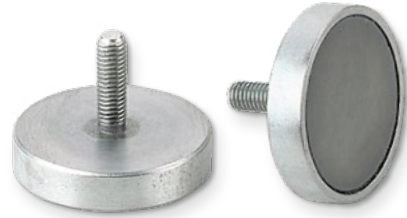

Type	mm				Rated holding force	kg
	A	B	C	D		
MH 33 - 10	10	4.5	M 4	12.5	25	0.003
MH 33 - 13	13	4.5	M 5	12.5	60	0.005
MH 33 - 16	16	4.5	M 6	12.5	95	0.008
MH 33 - 20	20	6	M 6	16	140	0.016
MH 33 - 25	25	7	M 6	17	200	0.025
MH 33 - 32	32	7	M 6	17	350	0.048



**ORDERING EXAMPLE**

Designation SAV no. - type  
 Holding magnet SAV 240.33 - MH 33 - 32

**SAV 240.36**

**HOLDING MAGNETS**

High-energy magnets, stud with internal thread (flat pot magnet)

**DESIGN**


Shielded system, galvanised surface. Max. service temperature: 80 °C.

**FASTENING OPTION**


Screwing in

**MAGNET MATERIAL**

NdFeB

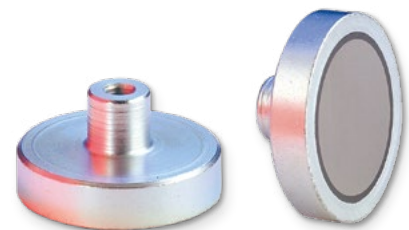

Type	mm							Rated holding force	kg
	A ±0.2	B ±0.2	C	D	E	F			
MH 36 - 06	6	4.5	M 3	6	11.5	7	5	0.002	
MH 36 - 08	8	4.5	M 3	6	11.5	7	13	0.003	
MH 36 - 10	10	4.5	M 3	6	11.5	7	25	0.004	
MH 36 - 13	13	4.5	M 3	6	11.5	7	60	0.005	
MH 36 - 16	16	4.5	M 4	6	11.5	7	95	0.007	
MH 36 - 20	20	6	M 4	8	13	7	140	0.016	
MH 36 - 25	25	7	M 4	8	14	7	200	0.027	
MH 36 - 32	32	7	M 5	10	15.5	8.5	350	0.045	



**ORDERING EXAMPLE**

Designation SAV no. - type  
 Holding magnet SAV 240.36 - MH 36 - 32