

SAV 483.02

ZERO SETTER – THE ORIGINAL


Vertical and horizontal

APPLICATION

For adjusting the tools (e.g. milling cutter) to “zero” and for determining the reference point of the machine spindle. No damage to tools during start-up, no feeler gauge or centre finder required.

DESIGN

Spring-loaded contact pad and housing body made of hardened tool steel, precision ground. Delivered complete with dial gauge (0.01 mm reading accuracy) in rubber storage box.

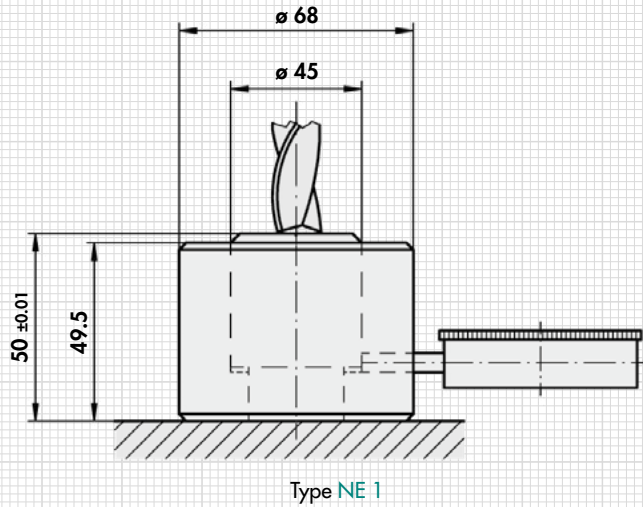

Reading accuracy of the dial gauge	in mm	0.01
Housing height – reference surface	in mm	49.5
Height of spring-loaded contact pad	in mm	51.5
Housing diameter	in mm	68
Contact pad diameter	in mm	45

ORDERING EXAMPLE

Designation	SAV no. - type
Zero setter	SAV 483.02 - NE 1